

Ali Al Dousari For Diesel Generators

DME-400

**DME-power is
Reliable in every
Application**



We offer a wide range of products, which are supported by our proven years of unrivaled, reliable and consistent service. These products have established high benchmarks as preferred solutions for energy needs worldwide.

Generator Output Rating at -50HZ

400V- 415V	KVA	KW
Prime	400	320
Standby	450	360

@ 0.8 p.f.

Generator Output Rating at -60HZ

480V	KVA	KW
Prime	440	352
Standby	495	396

@ 0.8 p.f.

Engine Data

Engine Manufacturer:	Perkins UK
Engine Model:	2206A-E13TAG3
Number of Cylinders:	6
Cylinder Arrangement:	Vertical In Line
Cycle:	4 Stroke
Bore/Stroke mm (in):	130(5.1) / 157.0(6.1)
Induction:	Turbo charged & air-to-air charge cooled
Compression ratio:	16.3:1
Displacement l (cu.in):	12.5(762.8)

General Data

	Liter
Fuel Tank Capacity:	515 L
Fuel Tank:	UV Resistant MDPE
Base Frame:	Heavy Duty-Powder Coated
Control Panel:	Deep Sea Electronics DSE6110
Circuit Breaker:	ABB 3 Pole MCB

Performance

Engine Speed:	1500		1800	
Gross Engine Power:	kWm	Bhp	kWm	Bhp
Prime:	368.4	494.0	373.4	500.7
Standby:	412.5	553.2	406.5	545.1
Fuel Consumption:	L/Hr	US Gal/Hr	L/Hr	US Gal/Hr
Prime:	81	21.4	81	21.4
Standby:	90	23.78	87	22.98

Standard Reference Conditions:

Output ratings are presented at normal conditions of temperature and pressure. This generator set is designed to operate in high ambient temperatures and altitudes.

Please consult your dealer for specific site ratings.

Sound Proof Dimension

Length

450 cm

Width

160 cm

Height

235 cm

Weight

3453 kg

Rating Definition

P Prime Rating

These rating are applicable for supplying continuous electrical power (at variable load) in lieu of commercially purchased power. This model can supply 10% overload power for 1 hour in 12 hours.

S Standby Rating

These rating are applicable for supply continuous electrical power (at variable load) in the event of utility power failure. *No overload is permitted on these ratings. The alternator model is peak continuous rated (as defined in ISO 8528-3)*

Air Flow

50Hz

60Hz

M³/min Ft³/min M³/min Ft³/min

Combustion Air Flow:	26.4	932	29.0	1024
Exhaust Gas Flow:	72.5	2560	73.5	2596
Radiator Cooling: Air Flow	654.0	23096	788.0	27828

*Cooling system designed to operate in high ambient conditions

Alternator Data

Alternator Manufacturer:	Leroy Somer
Alternator Model:	LSA47.2 S4 TAL047A
Number of Bearings:	Single (1)
Insulation Class:	H
Total Harmonic Distortion:	< 2 < 5%
Wires:	12 6
Ingress Protection Rating:	IP 23
Excitation System:	Shunt
Winding Pitch Code:	2/3 - 6

Cooling & Lubrication 50Hz

60Hz

	Liter	US/Gal	Liter	US/Gal
Coolant Capacity:	51.4	13.6	51.4	13.6
Lube Oil Capacity:	40.0	10.6	40.0	10.6
	°C	°F	°C	°F
Exhaust Temperature:	630	1166	660	1220



Other Information

Generating Set Standards

This generating set meets the following standards: ISO8528, BS4999, BS5514, IEC60034, VDE0530

Warranty

This generator is covered against manufacturing and workmanship defects. Kindly refer to warrant statement for more details.

Picture shown in leaflet may include optional accessories



Perkins manufactures diesel engines and power solutions to the highest levels of performance and reliability. DME incorporates this engine throughout their full range.




Leroy Somer is a world leader in the manufacturing of power generation, combining quality with performance to produce a market leading alternator for DME.



Deep Sea Electronics control modules deliver unrivaled functionality and performance. DME generating sets use this latest technology to its full potential.

Distributed & Serviced by:

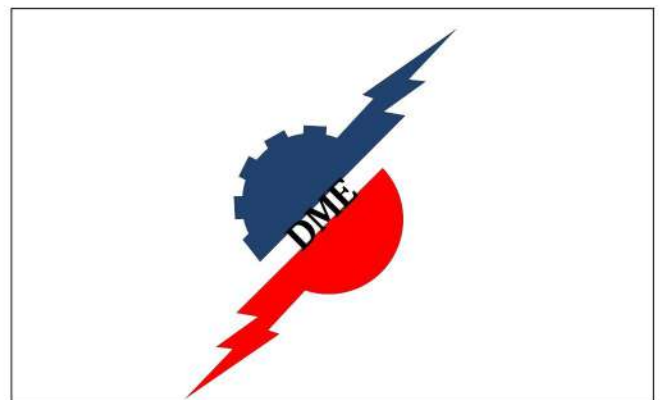

Ali AL Dousari For Diesel Generators,

Ali Hadi Al-Dousari For Machinery

and Equipments Est ,

in Saudi Arabia

966-500518020-505605045

info@dme-generators.com

965-95000802-96082227

in Kuwait

info.kuwait@dme-generator

