



**DME-power is
Reliable in every
Application**



We offer a wide range of products, which are supported by our proven years of unrivaled, reliable and consistent service. These products have established high benchmarks as preferred solutions for energy needs worldwide.

Generator Output Rating at -50HZ

400V- 415V	KVA	KW
Prime	600	480
Standby	660	528

@ 0.8 p.f.

Generator Output Rating at -60HZ

480V	KVA	KW
Prime	625	500
Standby	660	528

@ 0.8 p.f.

Engine Data

Engine Manufacturer:	Perkins USA
Engine Model:	2806A-E18TAG1A
Number of Cylinders:	6
Cylinder Arrangement:	Vertical In Line
Cycle:	4 Stroke
Bore/Stroke mm (in):	145.0(5.7) / 183.0(7.2)
Induction:	Turbo charged & air-to-air charge cooled
Compression ratio:	14.5:1
Displacement l (cu.in):	18.13(1106)

General Data

	Liter
Fuel Tank Capacity:	800 L
Fuel Tank:	UV Resistant MDPE
Base Frame:	Heavy Duty-Powder Coated
Control Panel:	Deep Sea Electronics DSE6120
Circuit Breaker:	ABB 3 Pole MCB

Performance

	Engine Speed:			
	1500	1800		
Gross Engine Power:	kWm	Bhp	kWm	Bhp
	Prime:	539.7	723.7	567.7
Standby:	592.7	794.8	623.0	835.4
Fuel Consumption:	L/Hr	US Gal/Hr	L/Hr	US Gal/Hr
	Prime:	123	32.49	127
Standby:	134	35.40	141	37.25

Standard Reference Conditions:

Output ratings are presented at normal conditions of temperature and pressure. This generator set is designed to operate in high ambient temperatures and altitudes.

Please consult your dealer for specific site ratings.

Sound Proof Dimension

Length

515 cm

Width

180 cm

Height

250 cm

Weight

4655 kg

Rating Definition

P Prime Rating

These rating are applicable for supplying continuous electrical power (at variable load) in lieu of commercially purchased power. This model can supply 10% overload power for 1 hour in 12 hours.

S Standby Rating

These rating are applicable for supply continuous electrical power (at variable load) in the event of utility power failure. *No overload is permitted on these ratings. The alternator model is peak continuous rated (as defined in ISO 8528-3)*

Air Flow

	50Hz		60Hz	
	M ³ /min	Ft ³ /min	M ³ /min	Ft ³ /min
Combustion Air Flow:	36.6	1271	45.0	1589
Exhaust Gas Flow:	104.0	3673	118.0	4167
Radiator Cooling: Air Flow	702.0	24790	852.0	30088

*Cooling system designed to operate in high ambient conditions

Alternator Data

Alternator Manufacturer:	Leroy Somer
Alternator Model:	LSA47.2 L9 TAL047E
Number of Bearings:	Single (1)
Insulation Class:	H
Total Harmonic Distortion:	< 2 < 5%
Wires:	12 6
Ingress Protection Rating:	IP 23
Excitation System:	Shunt
Winding Pitch Code:	2/3 - 6

Cooling & Lubrication

	50Hz		60Hz	
	Liter	US/Gal	Liter	US/Gal
Coolant Capacity:	61.0	16.1	61.0	16.1
Lube Oil Capacity:	62.0	16.4	62.0	16.4
	°C	°F	°C	°F
Exhaust Temperature:	571	1060	489	912



Other Information

Generating Set Standards


This generating set meets the following standards: ISO8528, BS4999, BS5514, IEC60034, VDE0530

Warranty

This generator is covered against manufacturing and workmanship defects. Kindly refer to warrant statement for more details.

Picture shown in leaflet may include optional accessories

Distributed & Serviced by:

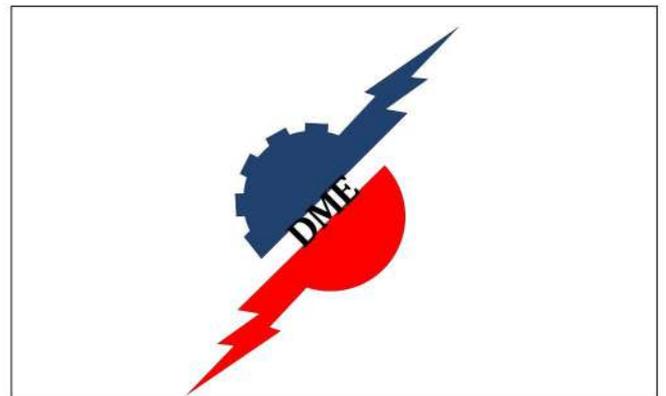

Perkins manufactures diesel engines and power solutions to the highest levels of performance and reliability. DME incorporates this engine throughout their full range.



Leroy Somer is a world leader in the manufacturing of power generation, combining quality with performance to produce a market leading alternator for DME.



Deep Sea Electronics control modules deliver unrivaled functionality and performance. DME generating sets use this latest technology to its full potential.



Ali Hadji Al-Dousari For Machinery

and Equipments Est ,

in saudi Arabia

966-500518020-505605045

info@dme-generators.com



965-95000802-96082227



info.kuwait@dme-generator

Ali AL Dousari For Diesel Generators,

الري , خلف مجمع الافنيوز

in kuwait

